


Project Ref:

Item Ref:

CTB2 Cubitt Trimless Base Twin

75x150mm Fixed Architectural Downlight


Spectrum

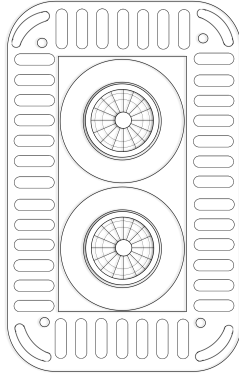

Cut Out: 92x184mm
Outer Dimensions: 75x150mm

Luminaire Details

Type	Fixed Architectural Downlight
Light Source	Spectrum LED light engine with integral mains dim driver
IP Rating	IP54 (Bathroom Zones 1&2)
Fire Rating	Optional with Envirograf accessory see page 2
Warranty	Five Years
Class	SELV Class III
Construction	Machined steel and aluminium
Bezel Finish	White RAL9010 fine texture
Bezel Options	Black, Bronze, Copper RAL finish to order



Dimensions

Width	75mm
Length	150mm
Cut Out	92x184mm
Clearance	10mm above 50mm from edge of cut out

Installation Notes

Do NOT cover with insulation.
Suitable for plasterboard ceilings.
Please ensure installer is familiar with this method.

Light Engine Details

Spectrum Pure

LED	Bridgelux Thrive
Power	12.4w
Engine Lumens	1200lm
Colour Temp	2700K 3000K 4000K
Optic	15° 24° 38° 60° Beam
CRI	Ra98 (R9: 99)
Rated Life	tp90° >50,000hrs L90B10

Spectrum Ambient

LED	Bridgelux Vesta
Power	12.4w
Engine Lumens	1200lm
Colour Temp	Warm Dim 1800-3000K
Optic	15° 24° 38° 60° Beam
CRI	Ra97 (R9: 99)
Rated Life	tp90° >50,000hrs L90B10

Driver Details

Mains Dim	Osram OTe13 350mA 35v Remote mounted Pre-wired with 0.35m LS0H mains cable
DALI	350mA 35v Remote mounted
Casambi	350mA 35v Remote mounted
NB:	To check current dimming compatibility contact us at info@colourbox.studio .

Colourbox Studio Ltd

52 St Mary's Road Faversham Kent ME13 8EH
Tel: 01795 505370 Email: info@colourbox.studio

