

Project Ref:


COLOURBOX.STUDIO

Item Ref:


DTF2 Delta Trimless Fixed Twin

2x75mm Fixed Architectural Downlight

AC7

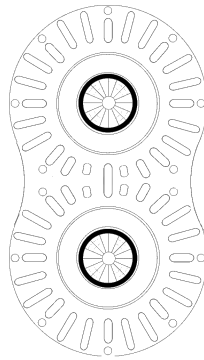


Cut Out: Ø2x95mm
Visible Diameter: Ø2x75mm

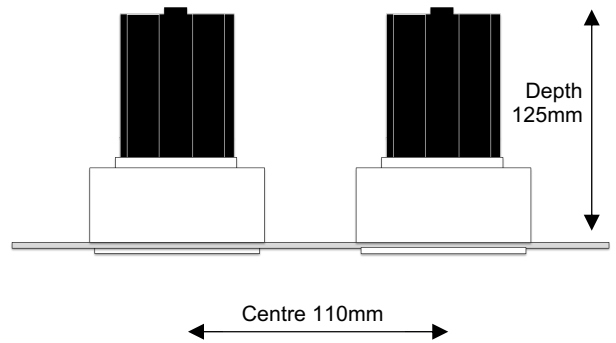

Luminaire Details

Type	Twin Fixed Architectural Downlight
Light Source	AC7 LED light engine with integral mains dim driver
IP Rating	IP54 (Bathroom Zones 1&2)
Fire Rating	Optional with Envirograf accessory see page 2
Warranty	Five Years
Construction	Machined steel and aluminium
Bezel Finish	White RAL9010 fine texture
Bezel Options	Black, Bronze, Copper RAL finish to order
Baffle Finish	Black RAL9005
Baffle Options	White RAL9010, Bronze, Copper RAL finish to order



Dimensions

Cut Out	Ø2x95mm
Visible Diameter	Ø2x75mm
Skim Plate Width	145mm
Skim Plate Length	255mm
Hole Saw	Starrett FCH0334
Clearance	10mm above 50mm from edge of cut out

Installation Notes

Do NOT cover with insulation.
Plaster-in installation.
Please ensure installer is familiar with this method.

Light Engine Details

AC7	
Driver	Integral Mains Dim
Class	Class II
Power	9.5w
Engine Lumens	750lm
Colour Temp	2700K 3000K 4000K
Optic	12° 24° 38° Beam
CRI	Ra95 (R9: 74)
Rated Life	tp75° >50,000hrs L70B50
Dimming	Suitable for leading and trailing edge dimmers. Lutron approved.

NB: To check current dimming compatibility contact us at info@colourbox.studio.

Colourbox Studio Ltd

52 St Mary's Road Faversham Kent ME13 8EH
Tel: 01795 505370 Email: info@colourbox.studio


www.colourbox.studio

DTF2 Delta Trimless Fixed Twin

2x75mm Fixed Architectural Downlight

AC7

Beam Diagrams

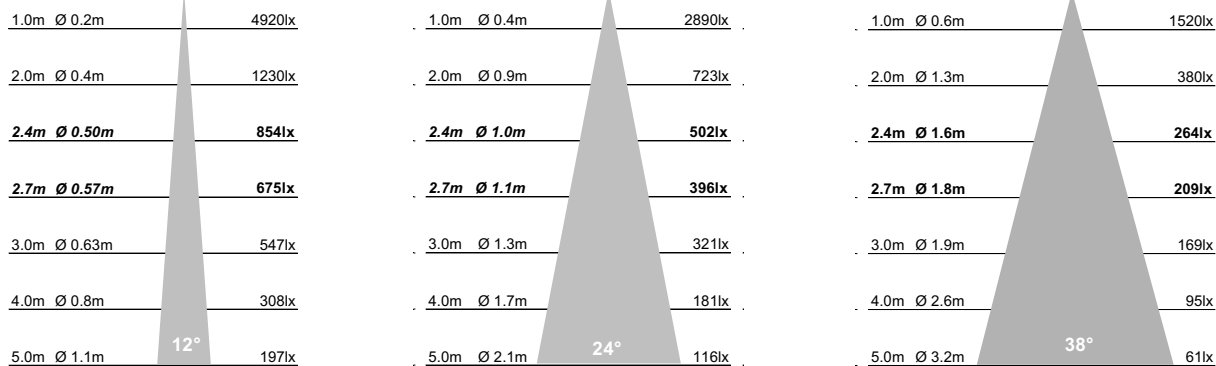

Fire Rating Accessory


F Fire Collar IDR5035
 Manufacturer Envirograf
 Technology Intumescent 60mins
 Installation Factory fitted. Can be retro-fitted.

Optical Accessories

HCL Honeycomb Louvre
 BSL Beam Softening Lens
 OSL Opal Spreader Lens
 CWF Colour Warming Filter

Electrical Accessory

CF Click Flow Plug/Play Connector

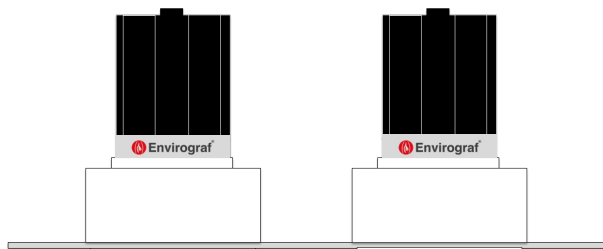

Product Configurator

Bezel			Light Engine			Accessories	
Bezel	Bezel Colour	Baffle Colour	Light Engine	Beam	Colour Temperature	F	Fire Collar
	W (RAL9010)	BB (RAL9005)		12°	927 (2700K)	CF	Click Flow Connector
	B (RAL9005)	WB RAL9010	AC7	24°	930 (3000K)	IP	IP65 Upgrade
DTF2	C (Copper)	CB (Copper)		38°	940 (4000K)	HCL	Honeycomb Louvre
	BZ (Bronze)	BZB (Bronze)				BSL	Beam Softening Lens
	RAL (RAL)	RAL (RAL)				EMG	3hr Emergency Conversion
Example: DTF2.W.BB/			AC7.38.927/			F/BSL	