

Project Ref:



COLOURBOX.STUDIO

Item Ref:

GTW Ghost Trimless Wallwash

75x91mm Fixed Architectural Downlight


AC7

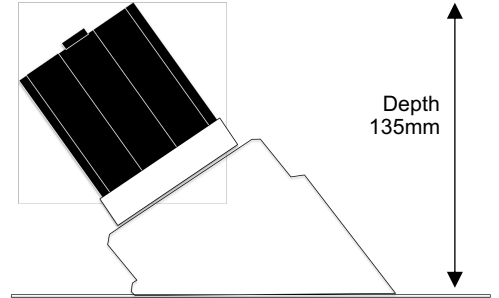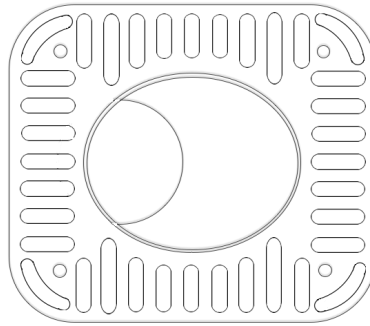

Cut Out: 95x120mm
Outer Diameter: Ø75x91mm

Luminaire Details

Type	Fixed Architectural Downlight
Light Source	AC7 LED light engine with integral mains dim driver
IP Rating	IP54 (Bathroom Zones 1&2)
Fire Rating	Optional with Envirograf accessory see page 2
Warranty	Five Years
Construction	Machined aluminium
Bezel Finish	White RAL9010 fine texture
Bezel Options	Black, Bronze, Copper RAL finish to order



Light Engine Details

AC7	
Driver	Integral Mains Dim
Class	Class II
Power	9.5w
Engine Lumens	750lm
Colour Temp	2700K 3000K 4000K
Optic	Asymmetric Beam (38° + Diffuser Lens)
CRI	Ra95 (R9: 74)
Rated Life	tp75° >50,000hrs L70B50
Dimming	Suitable for leading and trailing edge dimmers. Lutron approved.

NB: To check current dimming compatibility contact us at info@colourbox.studio.

Dimensions

Cut Out	95x120mm
Visible Diameter	Ø75x91mm
Skim Plate Width	145mm
Skim Plate Length	165mm
Clearance	10mm above 50mm from edge of cut out

Installation Notes

Do NOT cover with insulation.
Plaster-in installation.
Please ensure installer is familiar with this method.

Colourbox Studio Ltd

52 St Mary's Road Faversham Kent ME13 8EH
Tel: 01795 505370 Email: info@colourbox.studio

www.colourbox.studio

GTW Ghost Trimless Wallwash


75x91mm Fixed Architectural Downlight

AC7

Luminaire Spacing

Distance from wall	0.6m	0.9m	1.2m
Suggested spacing	1.2m	1.5m	1.8m
Distance from ceiling			
0.5m	300lx	120lx	47lx
1.0m	131lx	122lx	120lx
1.5m	62lx	64lx	90lx
2.0m	38lx	47lx	42lx
2.5m	21lx	27lx	31lx
3.0m	16lx	20lx	22.5lx

Polar Curve

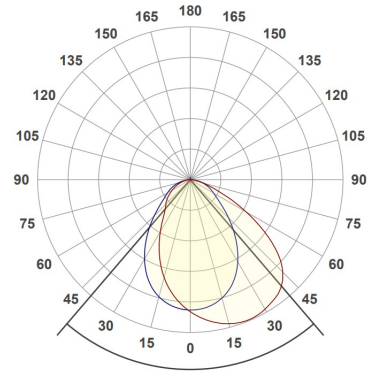


Fire Rating Accessory

F Fire Collar IDR5035
 Manufacturer Envirograf
 Technology Intumescent 60mins
 Installation Factory fitted. Can be retro-fitted.

Electrical Accessory

CF Click Flow Plug/Play Connector

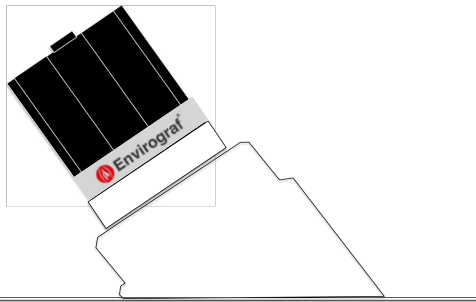

Product Configurator

Bezel		Light Engine			Accessories	
Bezel	Bezel Colour	Light Engine	Beam	Colour Temperature	F	Fire Collar
	W (RAL9010)			927 (2700K)	CF	Click Flow Connector
	B (RAL9005)	AC7	38°	930 (3000K)	EMG	3hr Emergency Conversion
GTW	C (Copper)			940 (4000K)		
	BZ (Bronze)					
	RAL (RAL)					
Example: GTW.W/		AC7.38.927/			F/BSL	