

CBXL-HD LINEA HD High Density 240 LED Flex



Project Ref _____

Item Ref _____

CBX-HD Flex Details


Type	Dimmable 24v LED flexible tape
Fixing	3M Self adhesive backing tape
Warranty	FIVE Years
Class	SELV Class III
IP rating	IP20 / IP65
PCB Weight	60g
Col Consistency	Single Bin
Reel length	5m
Pre-Wiring	200mm cable at each end

Description

- High Density 240 LEDs/m dimmable LED flexible tape.
- 25mm cut points for excellent cutting accuracy.
- Close pitch LEDs for linear spot free LED finish.
- High CRI (95Ra) for very high light quality.
- Multiple wattages for use in various applications including cove lighting, shelving, kitchen units, stairs.
- Choice of colour temperature and IP20 and IP65 versions.

CBXL-HD LED Flex Specification & Performance

	240/9w	240/12w	240/20w
LED/m	240	240	240
Lumens/m	570-800lm	710-1000lm	1240-1400lm
Power	9w	12w	20w
Cut Point	25mm	25mm	25mm
Beam	120°	120°	120°
CCT	2200k	2200k	2200k
	2700k	2700k	2700k
	3000k	3000k	3000k
	4000k	4000k </td <td>4000k</td>	4000k
CRI	95Ra	95Ra	95Ra
Constant Voltage	24v	24v	24v
Life	>50k hrs	>50k hrs	>50k hrs

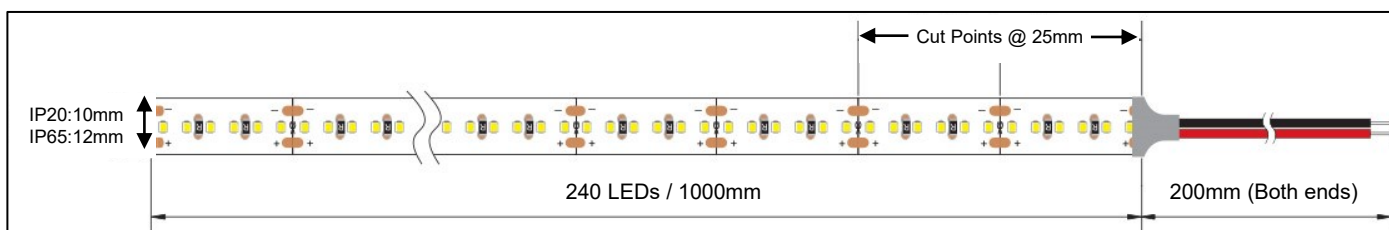

Ordering Information

Example: **CBXL-HD.9.927.IP65**

LED Flex	Watts	CCT	IP Rating	Mains Dim / Phase Cut
CBXL-HD	9	922 = 2200K	IP20	DALI
	12	927 = 2700K	IP65	Casambi (Low Energy Bluetooth Mesh)
	20	930 = 3000K		
		940 = 4000K		

Dimming Options